AERODROME CHART - ICAO

AD ELEVATION 47FT ARP 52 42 07N 008 55 29W


CONSULT NOTAM FOR LATEST INFORMATION

SHANNON AIRPORT IRELAND

ATS COMMUNICATION FACILITIES			
Service	**Call Sign**	**Channel**	Remarks
GND	Shannon Ground	121.805	Nil
TWR	Shannon Tower	118.705, 125.380	Nil
APP	Shannon Approach	121.405, 120.205	Nil
APP (RADAR)	Shannon Approach RADAR	121.405	Nil
ATIS	Shannon Information	130.955	Nil
D-ATIS	Shannon Information		Operators equipped with AEEC623 compliant ACARS-MU can interface with the service through ARINC and SITA service provider's network.

RUNWAY/ TAXIWAY/ APRON PHYSICAL CHARACTERISTICS			
RWY/ TWY/ APRON	**SURFACE**	**BEARING STRENGTH**	**WIDTH**
RWY 05/23	Asphalt (Grooved)	PCN 82/R/C/X/T	45m
Taxiway A	Asphalt	PCN 75/R/C/W/U	23m
Taxiway B	Concrete/Asphalt	PCN 75/R/C/W/T	23m
Taxiway C	Asphalt	PCN 60/F/D/W/T	23m
Taxiway D1	Asphalt	PCN 75/R/C/W/U	23m
Taxiway D2	Asphalt	PCN 75/R/C/W/U	23m
Taxiway E3	Concrete	PCN 60/R/C/W/U	23m
Taxiway G	Concrete/Asphalt	PCN 55/R/C/W/T	23m
Taxiway H1	Concrete	PCN 17/R/D/W/U	23m
Taxiway H2	Concrete	PCN 17/R/D/W/U	23m
West Apron	Concrete	PCN 75/R/C/W/U	-
East Apron	Concrete	PCN 60/R/C/W/U	-
East Parking Area	Concrete	PCN 60/R/C/W/U	-
Aircraft Parking 1 & 2	Concrete	PCN 60/R/C/W/U	-

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS84) at the stated position	
BEARINGS ARE MAGNETIC LINEAR DIMENSIONS IN METRES	
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	**192** (68)

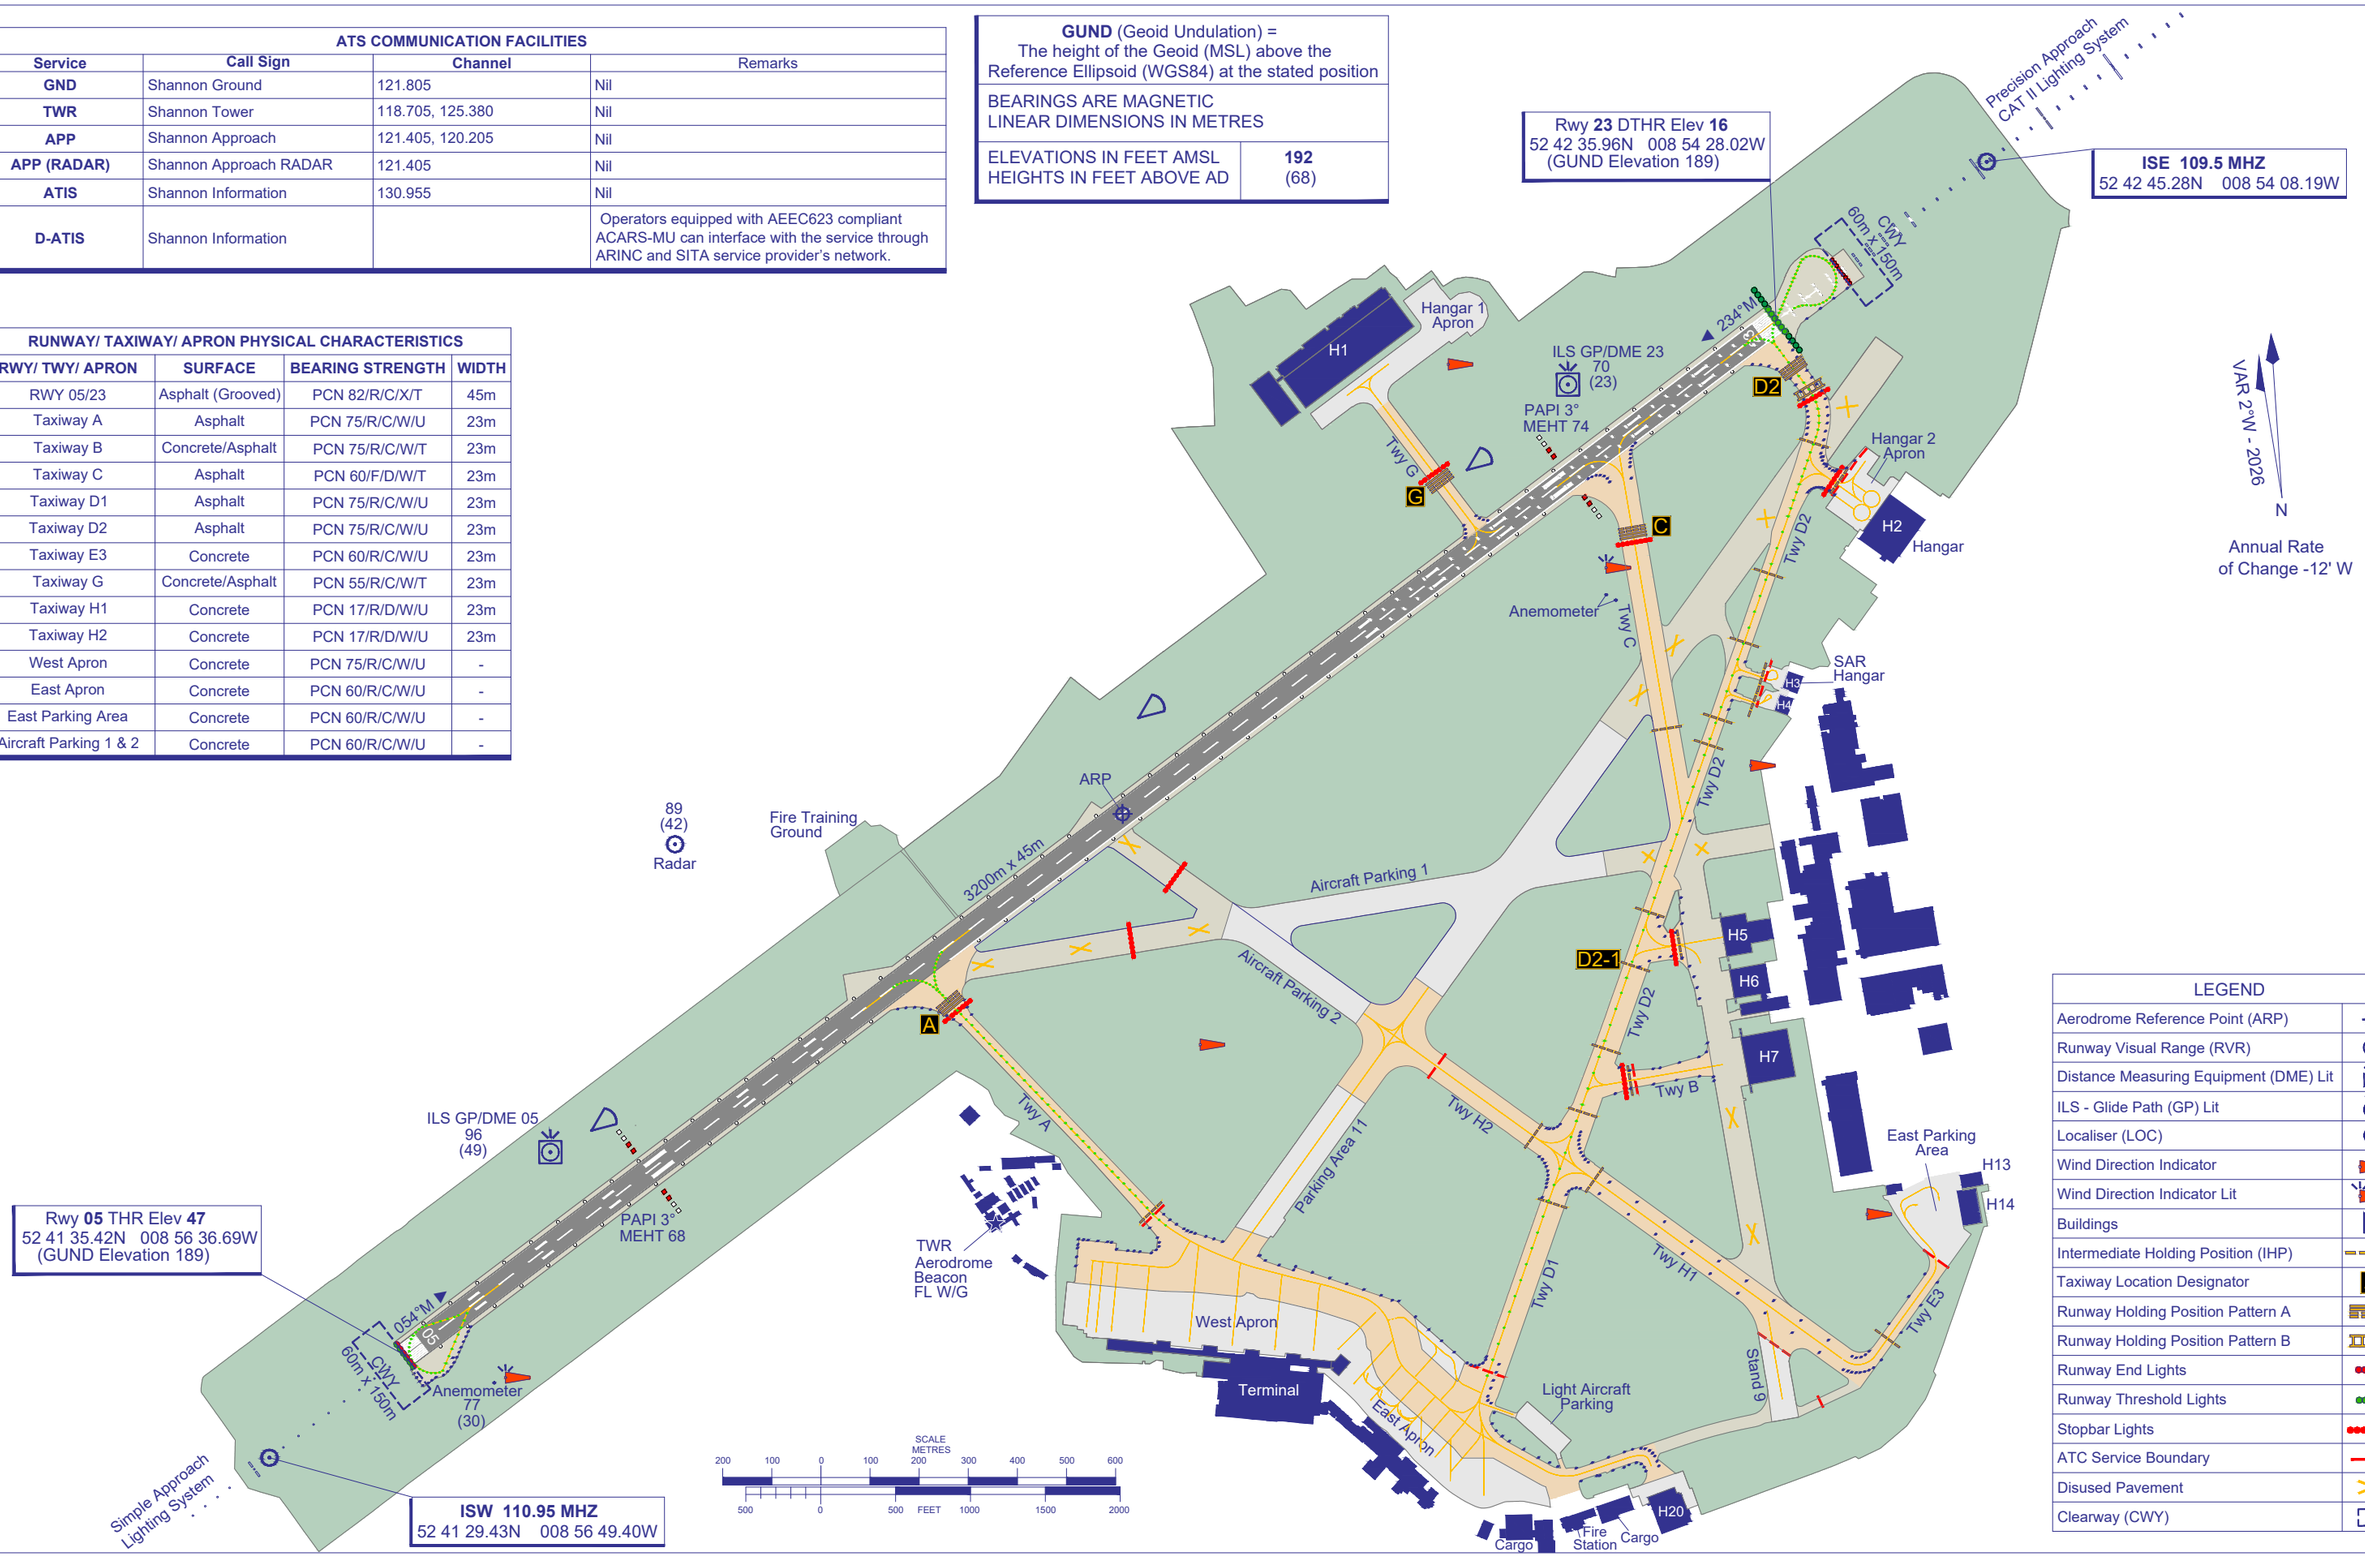

LEGEND	
Aerodrome Reference Point (ARP)	
Runway Visual Range (RVR)	
Distance Measuring Equipment (DME) Lit	
ILS - Glide Path (GP) Lit	
Localiser (LOC)	
Wind Direction Indicator	
Wind Direction Indicator Lit	
Buildings	
Intermediate Holding Position (IHP)	
Taxiway Location Designator	A
Runway Holding Position Pattern A	
Runway Holding Position Pattern B	
Runway End Lights	
Runway Threshold Lights	
Stopbar Lights	
ATC Service Boundary	
Disused Pavement	
Clearway (CWY)	

CHANGE: Runway redesignated from 06/24 to 05/23.