


RNAV - STANDARD  
ARRIVAL CHART  
INSTRUMENT (STAR) - ICAO

TRANS ALT 5000ft  
TRANS LEVEL by ATC

ATIS	118.530
TWR	130.705
GND	130.705
	121.905

IRELAND WEST / KNOCK  
RWY 26  
(ACFT CAT A, B, C, D)  
EDONO 1B, WOWEC 1B

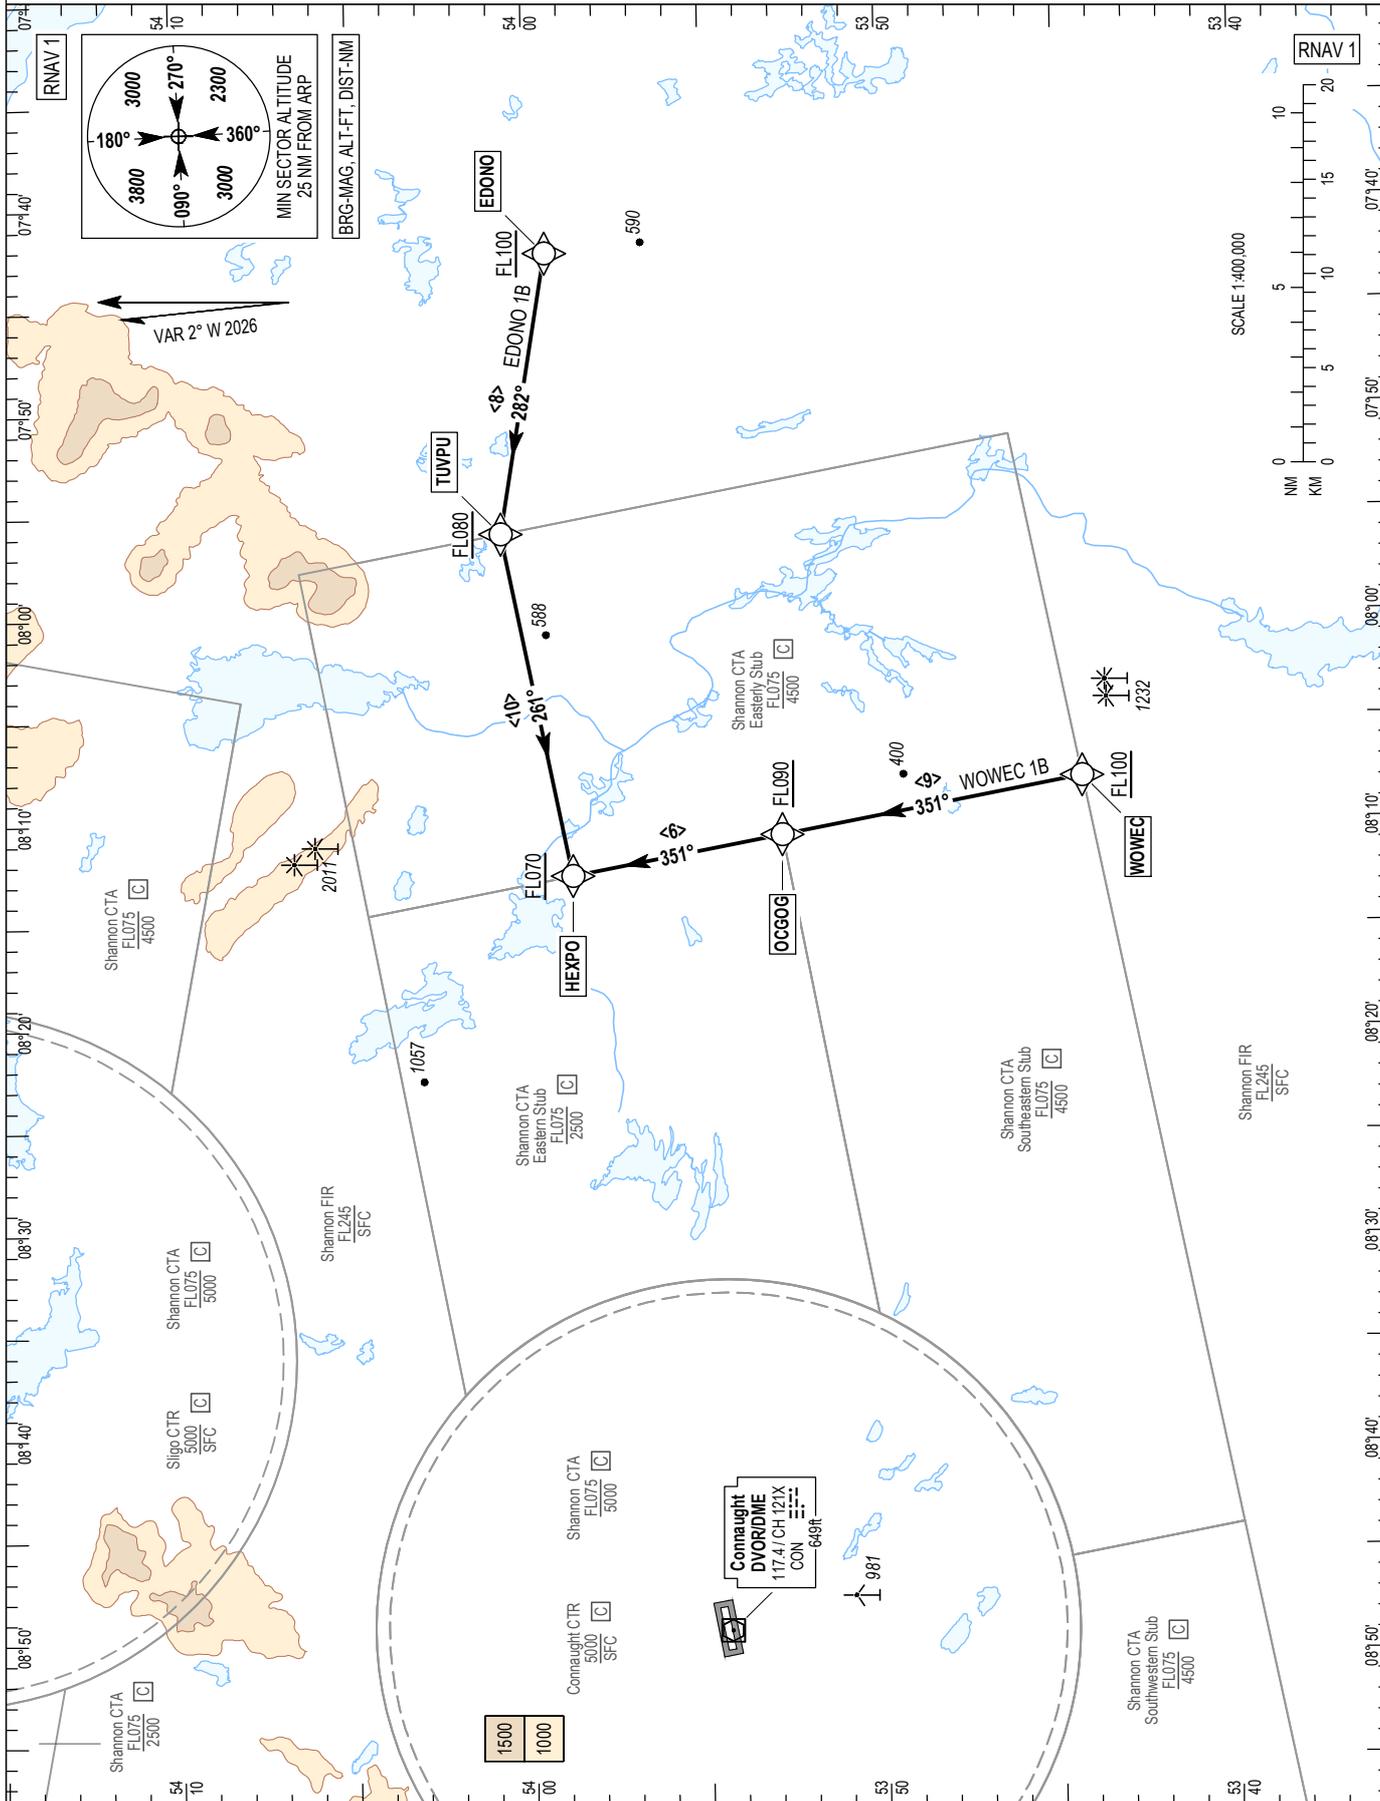

CHANGE: MAG VAR, Bearings, Frequencies.

NOTES:

1. Actual descent clearance will be as directed by ATC.
2. MAX IAS 250 kts below FL100.

**EDONO 1B STAR RWY26**

**EDON1B**

Nav. Spec.	WPT Name	Latitude (N) / Longitude (W)	Path Term	Fly-By Fly-Over	True Track / Mag Track	Distance (NM)	Upper Limit / Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	EDONO	535927.4 / 0074221.6	IF	-	-	-	- / +FL100	-	-
RNAV 1	TUVPU	540049.1 / 0075557.8	TF	Fly-By	279.7 / 282	8.1	- / +FL080	-	-
RNAV 1	HEXPO	535853.1 / 0081235.2	TF	Fly-By	258.9 / 261	10.0	- / +FL070	-	Turn L

**WOWEC 1B STAR RWY26**

**WOWE1B**

Nav. Spec.	WPT Name	Latitude (N) / Longitude (W)	Path Term	Fly-By Fly-Over	True Track / Mag Track	Distance (NM)	Upper Limit / Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	WOWEC	534425.2 / 0080756.4	IF	-	-	-	- / +FL100	-	-
RNAV 1	OCGOG	535256.1 / 0081040.1	TF	Fly-By	349.3 / 351	8.7	- / +FL090	-	-
RNAV 1	HEXPO	535853.1 / 0081235.2	TF	Fly-By	349.2 / 351	6.1	- / +FL070	-	-