


RNAV (GNSS) STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO

TRANS ALT 5000ft
TRANS LEVEL by ATC

TWR	119.300
GND	121.850
ATIS	120.925
CRK APP	119.900

CORK RWY 34

TISMO 1G, VAPAL 1G, GOTEM 1G, ELTIG 1G,
ERTER 1G, ORTOM 1G, SOVIX 1G, KURUM 1G.

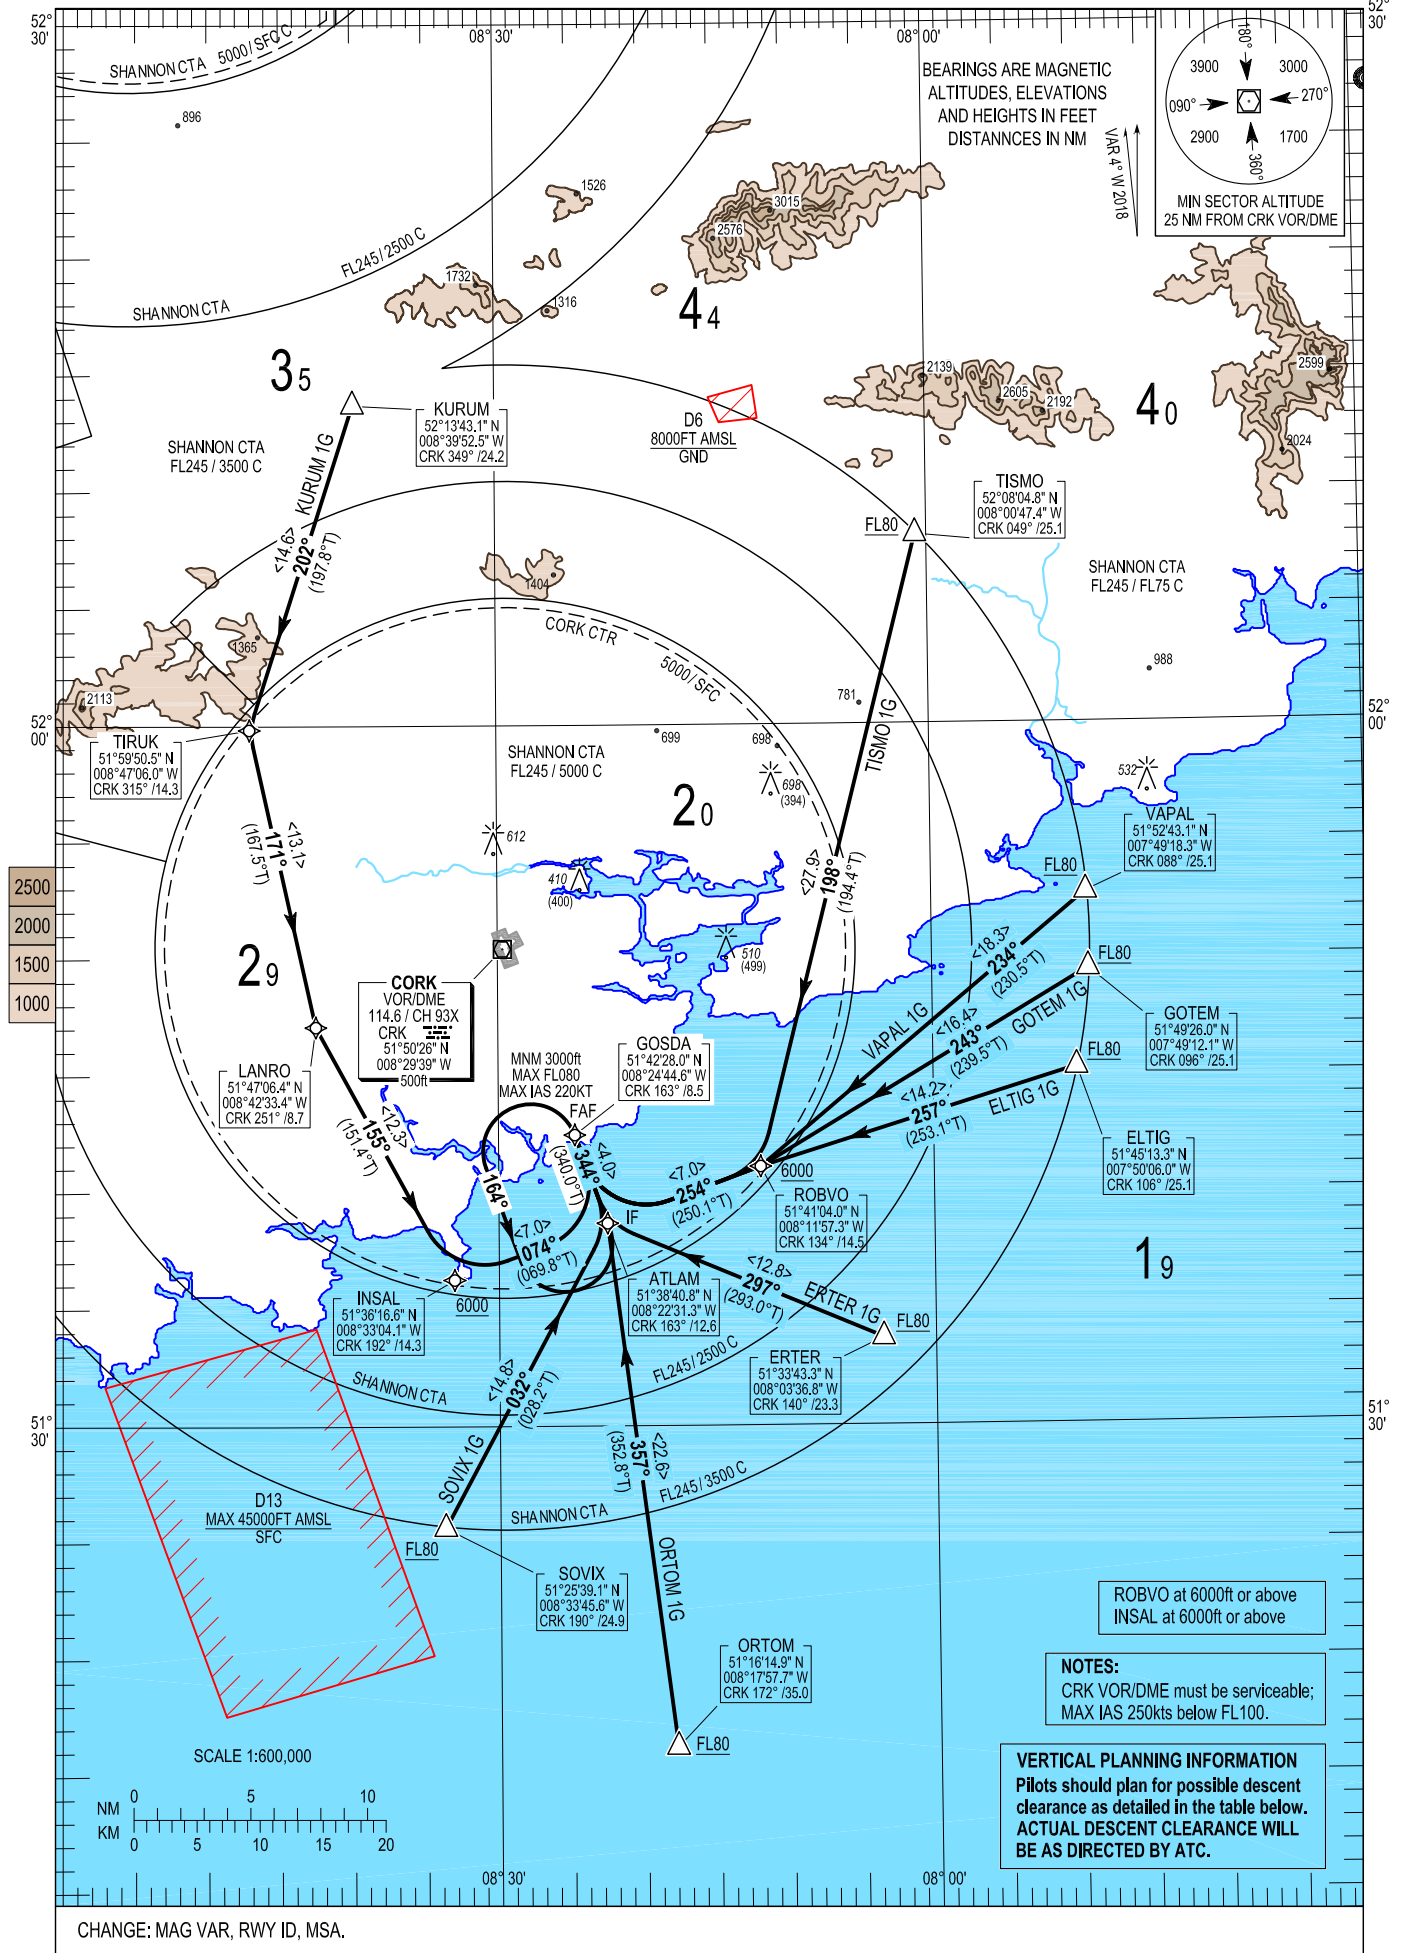

ELTIG1G CAT A/B/C/D STAR RWY34

ELTIIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ELTIG	514513.3 / 0075006.0	-	-	-	- / FL080	-	-
RNAV 1	TF	ROBVO	514104.0 / 0081157.3	Fly-By	14.2	253.1 / 257	- / 6000	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	7.0	250.1 / 254	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

ERTER1G CAT A/B/C/D STAR RWY34

ERTEIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ERTER	513343.3 / 0080336.8	-	-	-	- / FL080	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	12.8	293.0 / 297	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

GOTEM1G CAT A/B/C/D STAR RWY34

GOTEIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	GOTEM	514926.0 / 0074912.1	-	-	-	- / FL080	-	-
RNAV 1	TF	ROBVO	514104.0 / 0081157.3	Fly-By	16.4	239.5 / 243	- / 6000	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	7.0	250.1 / 254	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

KURUM1G CAT A/B/C/D STAR RWY34

KURUIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	KURUM	521343.1 / 0083952.5	-	-	-	-	-	-
RNAV 1	TF	TIRUK	515950.5 / 0084706.0	Fly-By	14.6	197.8 / 202	-	-	-
RNAV 1	TF	LANRO	514706.4 / 0084233.4	Fly-By	13.1	167.5 / 171	-	-	-
RNAV 1	TF	INSAL	513616.6 / 0083304.1	Fly-By	12.3	151.4 / 155	- / 6000	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	7.0	069.8 / 074	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

ORTOM1G CAT A/B/C/D STAR RWY34

ORTOIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ORTOM	511614.9 / 0081757.7	-	-	-	- / FL080	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	22.6	352.8 / 357	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

SOVIX1G CAT A/B/C/D STAR RWY34

SOVIIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	SOVIX	512539.1 / 0083345.6	-	-	-	- / FL080	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	14.8	028.2 / 032	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

TISMO1G CAT A/B/C/D STAR RWY34

TISMIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	TISMO	520804.8 / 0080047.4	-	-	-	- / FL080	-	-
RNAV 1	TF	ROBVO	514104.0 / 0081157.3	Fly-By	27.9	194.4 / 198	- / 6000	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	7.0	250.1 / 254	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

VAPAL1G CAT A/B/C/D STAR RWY34

VAPAIG

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True Track / Magnetic Track	Upper Limit/ Lower Limit	Speed Limit (kts)	Remarks
RNAV 1	IF	VAPAL	515243.1 / 0074918.3	-	-	-	- / FL080	-	-
RNAV 1	TF	ROBVO	514104.0 / 0081157.3	Fly-By	18.3	230.5 / 234	- / 6000	-	-
RNAV 1	TF	ATLAM	513840.8 / 0082231.3	Fly-By	7.0	250.1 / 254	-	220	-
RNAV 1	TF	GOSDA	514228.0 / 0082444.6	Fly-By	4.0	340.0 / 344	3000 / 3000	-	-

Hold Identification – EICK AD 2.24-15

Holding Fix	Latitude (N) / Longitude (W)	Inbound True Track (degrees)	Inbound Mag Track (degrees)	Maximum Indicated Airspeed (kts)	Maximum / Minimum Holding Altitude / Level (FL/ft)	Outbound Time (min)	Direction of Turn
GOSDA	514228.0 / 0082444.6	340.0	344	220	FL080/3000	1	L