


TWR	119.300
GND	121.850
ATIS	120.925
CRK APP	119.900

**CORK RWY 07**  
**CAT A, B**  
 TISMO 1F, VAPAL 1F, GOTEM 1F, ELTIG 1F,  
 ERTER 1F, ORTOM 1F, SOVIX 1F, KURUM 1F.

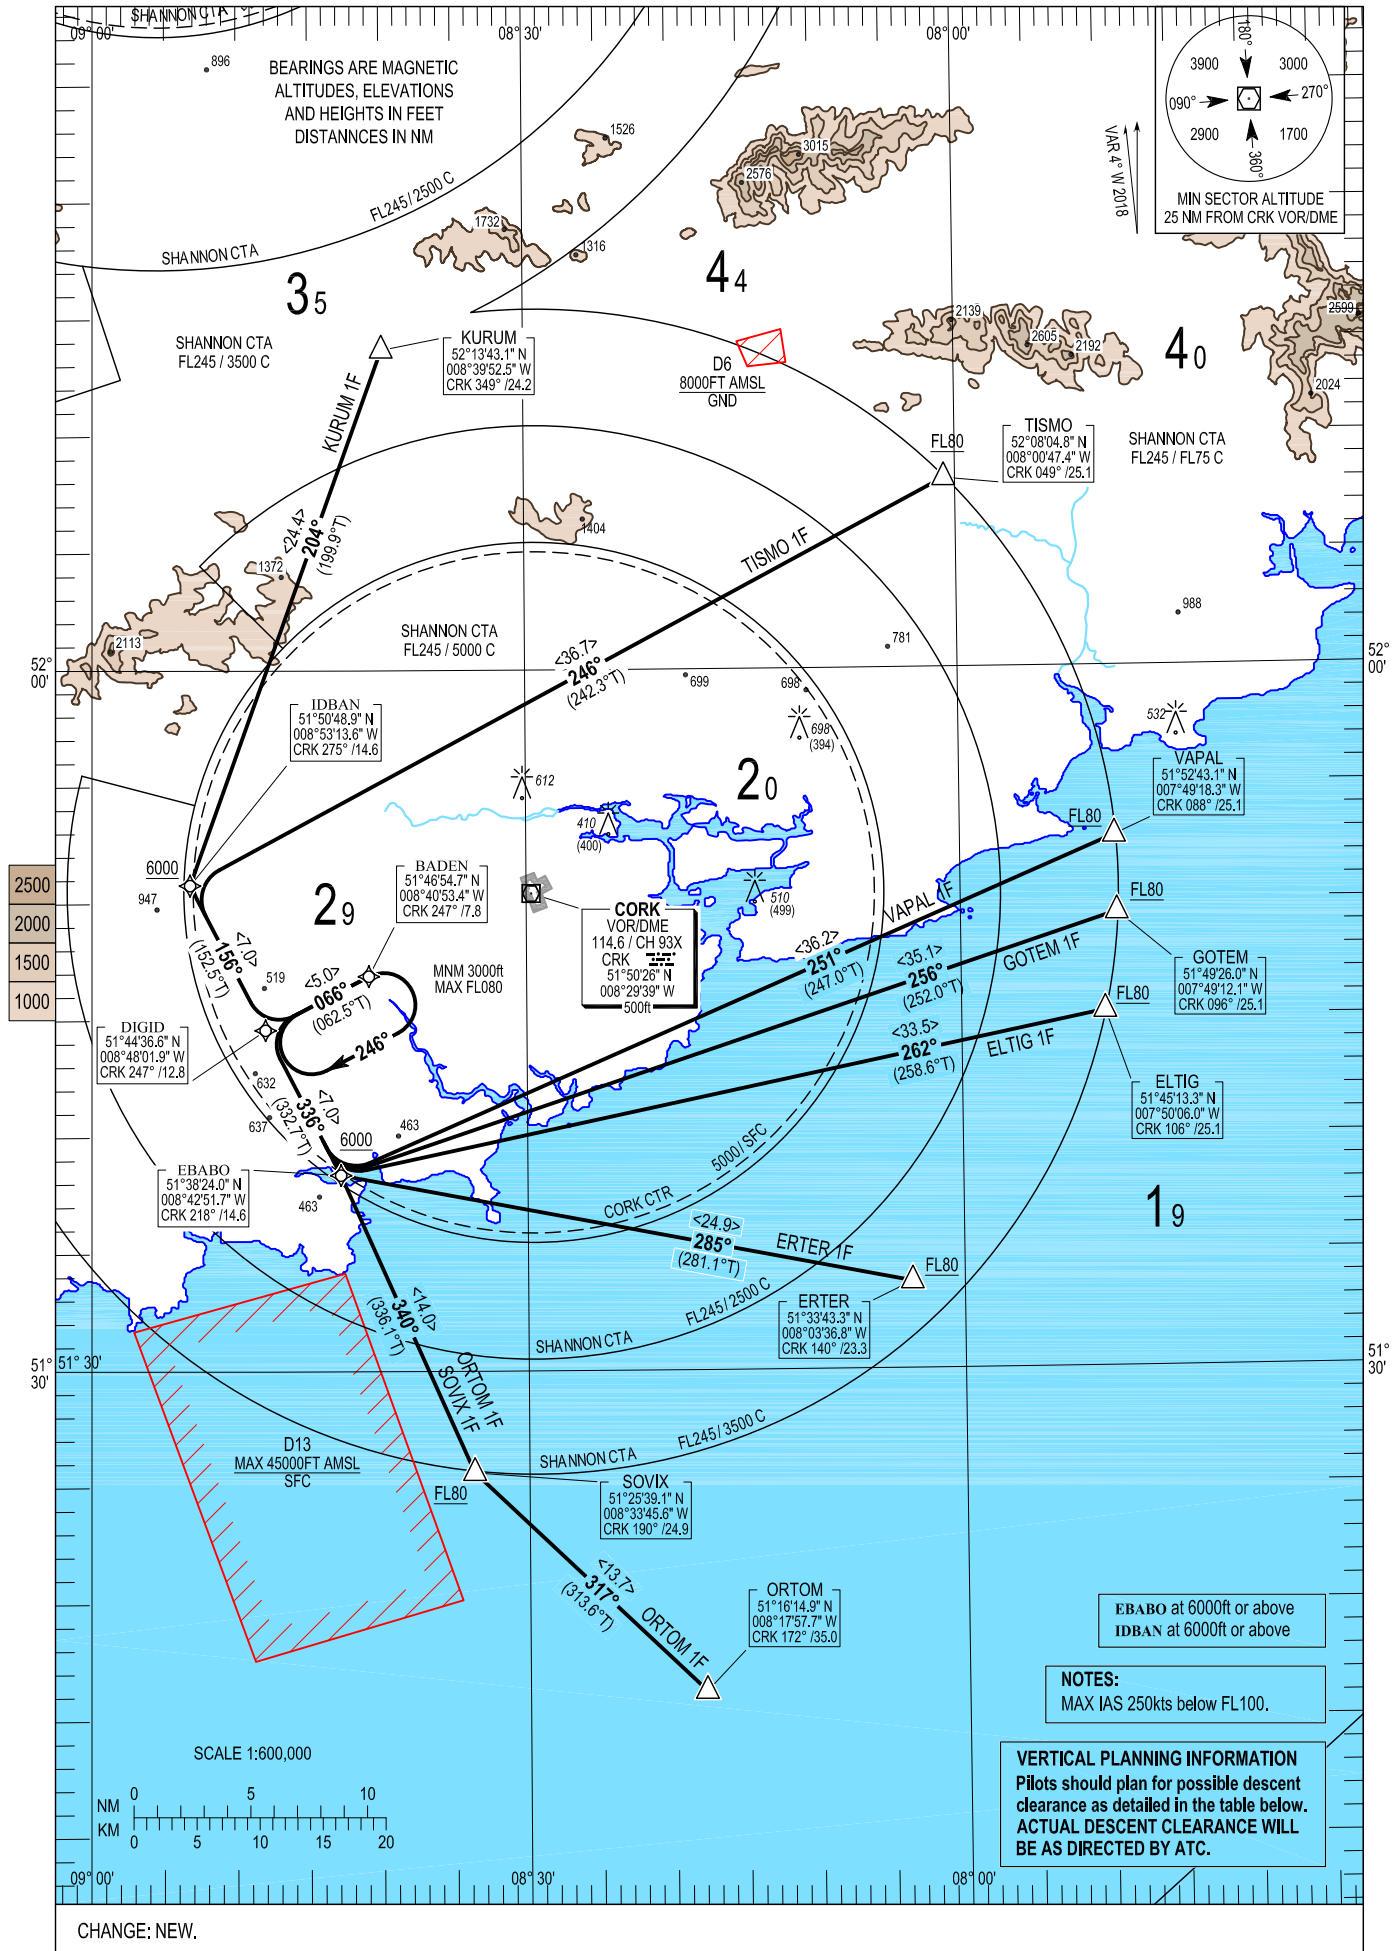

EBABO at 6000ft or above  
 IDBAN at 6000ft or above

**NOTES:**  
 MAX IAS 250kts below FL100.

**VERTICAL PLANNING INFORMATION**  
 Pilots should plan for possible descent  
 clearance as detailed in the table below.  
**ACTUAL DESCENT CLEARANCE WILL  
 BE AS DIRECTED BY ATC.**

CHANGE: NEW.

26 APR 2018

## ELTIG1F CAT A/B STAR RWY07

## ELTI1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ELTIG	514513.3 / 0075006.0	-	-	-	- / FL080	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	33.5	258.6 / 262	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## ERTER1F CAT A/B STAR RWY07

## ERTE1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ERTER	513343.3 / 0080336.8	-	-	-	- / FL080	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	24.9	281.1 / 285	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## GOTEM1F CAT A/B STAR RWY07

## GOTE1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	GOTEM	514926.0 / 0074912.1	-	-	-	- / FL080	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	35.1	252.0 / 256	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## KURUM1F CAT A/B STAR RWY07

## KURU1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	KURUM	521343.1 / 0083952.5	-	-	-	-	-	-
RNAV 1	TF	IDBAN	515048.9 / 0085313.6	Fly-By	24.4	199.9 / 204	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	152.5 / 156	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## ORTOM1F CAT A/B STAR RWY07

## ORTO1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	ORTOM	511614.9 / 0081757.7	-	-	-	- / FL080	-	-
RNAV 1	TF	SOVIX	512539.1 / 0083345.6	Fly-By	13.7	313.6 / 317	-	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	14.0	336.1 / 340	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## SOVIX1F CAT A/B STAR RWY07

## SOVI1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	SOVIX	512539.1 / 0083345.6	-	-	-	- / FL080	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	14.0	336.1 / 340	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## TISMO1F CAT A/B STAR RWY07

## TISM1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	TISMO	520804.8 / 0080047.4	-	-	-	- / FL080	-	-
RNAV 1	TF	IDBAN	515048.9 / 0085313.6	Fly-By	36.7	242.3 / 246	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	152.5 / 156	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## VAPAL1F CAT A/B STAR RWY07

## VAPA1F

Navigation Performance	Path Terminator	WPT Name	Latitude (N), Longitude (W)	Fly-By or Fly-Over	Distance (NM)	True track / Magnetic track	Upper limit / Lower limit	Speed Limit (kts)	Remarks
RNAV 1	IF	VAPAL	515243.1 / 0074918.3	-	-	-	- / FL080	-	-
RNAV 1	TF	EBABO	513824.0 / 0084251.7	Fly-By	36.2	247.0 / 251	- / 6000	-	-
RNAV 1	TF	DIGID	514436.6 / 0084801.9	Fly-By	7.0	332.7 / 336	-	-	-
RNAV 1	TF	BADEN	514654.7 / 0084053.4	Fly-By	5.0	062.5 / 066	3000 / 3000	-	-

## Hold Identification – EICK AD 2.24-16

Holding Fix	Latitude (N) / Longitude (W)	Inbound True Track (degrees)	Inbound Mag Track (degrees)	Maximum Indicated Airspeed (kts)	Maximum / Minimum Holding Altitude / Level (FL/ft)	Outbound Time (min)	Direction of Turn
BADEN	514654.7 / 0084053.4	062.4	066	-	FL080/3000	1	R