


RNAV - STANDARD
DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANS ALT 5000ft
TRANS LEVEL by ATC

| | |
|------|---------|
| ATIS | 118.530 |
| TWR | 130.705 |
| GND | 130.705 |
| | 121.905 |

IRELAND WEST / KNOCK
RWY 26
(ACFT CAT A, B, C, D)
ELGUX 1B, ORFOD 1B, PIXIB 1B

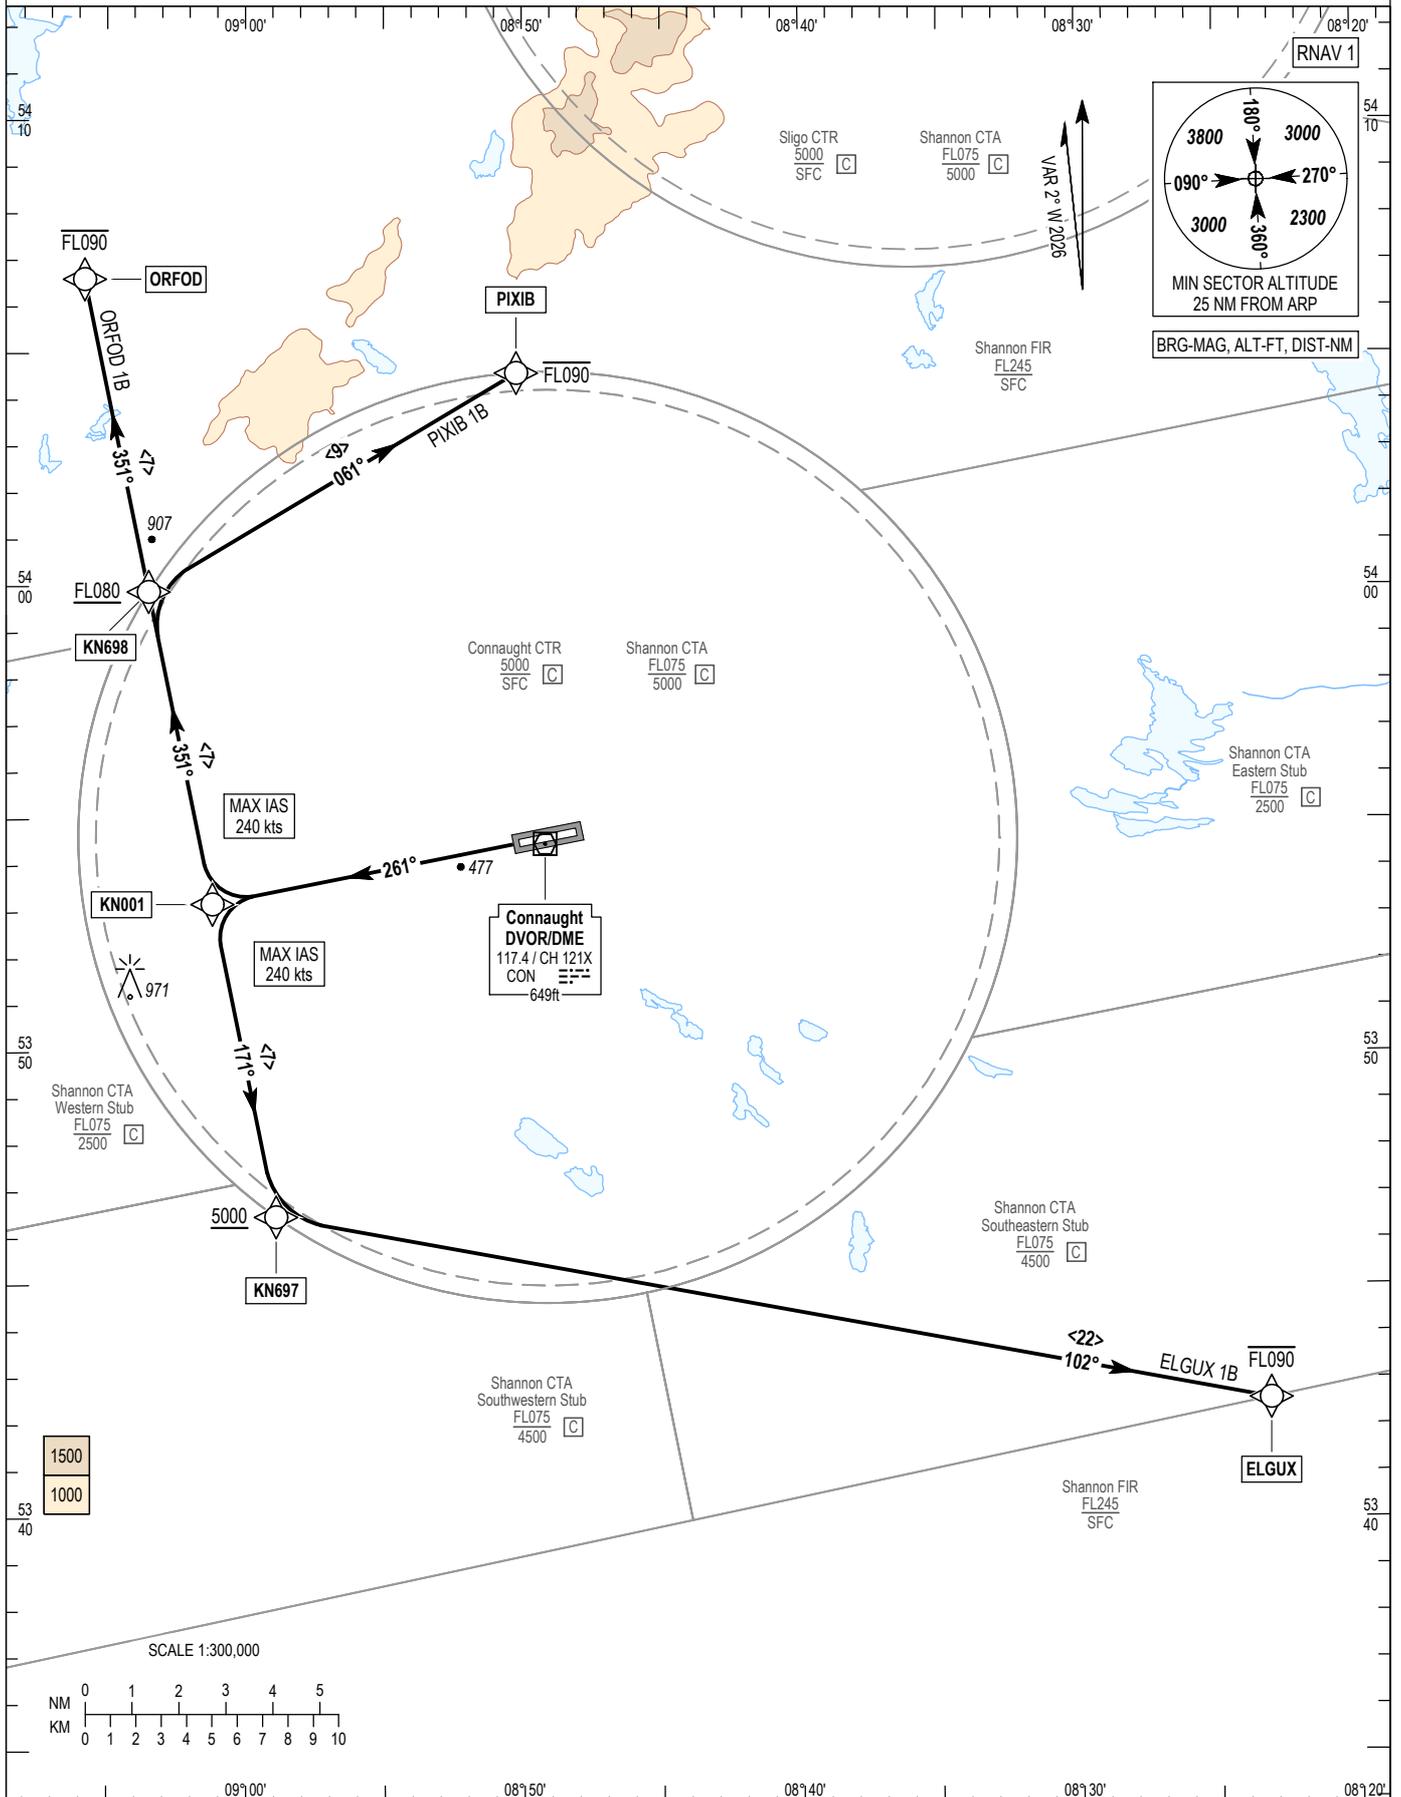

CHANGE: MG VAR, Bearings, Frequencies.

NOTES:

1. Climb gradient 6.6% (400 ft/NM) (3.3% for obstacle clearance).
2. All aircraft must request start and taxi clearance from ATC on frequency 130.70 Mhz (or 121.90 Mhz if no response from 130.70 Mhz).

3. Aircraft are not permitted to enter the runway even if the airport is closed unless previously arranged with ATC.

ELGUX 1B SID RWY26

ELGU1B

| Nav. Spec. | WPT Name | Latitude (N) / Longitude (W) | Path Term | Fly-By Fly-Over | True Track / Mag Track | Distance (NM) | Upper Limit / Lower Limit | Speed Limit (kts) | Remarks |
|------------|----------|------------------------------|-----------|-----------------|------------------------|---------------|---------------------------|-------------------|---------------------|
| RNAV 1 | KN001 | 535311.1 / 0090111.5 | CF | Fly-By | 258.7 / 261 | - | - | 240 | 262° CON / D7.2 CON |
| RNAV 1 | KN697 | 534628.6 / 0085854.1 | TF | Fly-By | 168.6 / 171 | 6.9 | - / +A5000 | 240 | Turn L |
| RNAV 1 | ELGUX | 534233.4 / 0082312.5 | TF | Fly-By | 100.3 / 102 | 21.6 | -FL090 / - | 240 | Turn L |

ORFOD 1B SID RWY26

ORFO1B

| Nav. Spec. | WPT Name | Latitude (N) / Longitude (W) | Path Term | Fly-By Fly-Over | True Track / Mag Track | Distance (NM) | Upper Limit / Lower Limit | Speed Limit (kts) | Remarks |
|------------|----------|------------------------------|-----------|-----------------|------------------------|---------------|---------------------------|-------------------|---------------------|
| RNAV 1 | KN001 | 535311.1 / 0090111.5 | CF | Fly-By | 258.7 / 261 | - | - | 240 | 262° CON / D7.2 CON |
| RNAV 1 | KN698 | 535953.6 / 0090329.7 | TF | Fly-By | 348.6 / 351 | 6.9 | - / +FL080 | 240 | Turn R |
| RNAV 1 | ORFOD | 540636.0 / 0090548.6 | TF | Fly-By | 348.5 / 351 | 6.9 | -FL090 / - | 240 | - |

PIXIB 1B SID RWY26

PIXI1B

| Nav. Spec. | WPT Name | Latitude (N) / Longitude (W) | Path Term | Fly-By Fly-Over | True Track / Mag Track | Distance (NM) | Upper Limit / Lower Limit | Speed Limit (kts) | Remarks |
|------------|----------|------------------------------|-----------|-----------------|------------------------|---------------|---------------------------|-------------------|---------------------|
| RNAV 1 | KN001 | 535311.1 / 0090111.5 | CF | Fly-By | 258.7 / 261 | - | - | 240 | 262° CON / D7.2 CON |
| RNAV 1 | KN698 | 535953.6 / 0090329.7 | TF | Fly-By | 348.6 / 351 | 6.9 | - / +FL080 | 240 | Turn R |
| RNAV 1 | PIXIB | 540435.0 / 0085013.3 | TF | Fly-By | 058.9 / 061 | 9.1 | -FL090 / - | 240 | Turn R |